

RIG #14 INVENTORY

BI-DIRECTIONAL WALKING SYSTEM

DRAWWORKS:

National 110-UE 1500 Electric

MAST & SUBSTRUCTURE:

142' mast rated at 750,000# SHL
25' high self-elevating sub with 20'7" clear height under beams with simultaneous rotary capacity of 750,000# and 500,000# setback

SCR:

IEC 4 Bay SCR

POWER:

3 Caterpillar 3512 w/1225 KW Generator sets

PUMP #1:

Continental Bomco 1600 triplex pump driven by 2 1000HP traction motors

PUMP #2:

Continental Bomco 1600 triplex pump driven by 2 1000HP traction motors


ROTATING & TRAVELING EQUIPMENT:

Rotary Table – 27½"
Skytop Traveling Block 400 Ton

TOP DRIVE:

NOV-TDS11 SA 500 Ton

LOCATION SIZE:

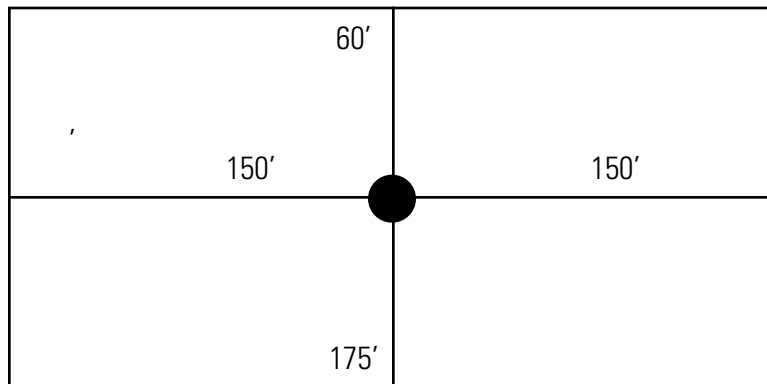

MUD SYSTEM:

2 tank, 1,100 bbl system
3 Derrick 513 HG shale shakers
De-Sander 2-Cone
De-Silter 12-Cone
Vacuum de-gasser

DRILL PIPE & DRILL COLLARS:

4½" & 5" G105 Drill Pipe – From Inventory as needed
6½" & 8" Drill Collars – From Inventory as needed

B.O.P:

Shaffer Type LWS 5000# Double Ram
Shaffer Type 11" 5000# Single Ram
Shaffer Type Annular 11" 5000#
Choke Manifold 4-1/16" x 3-1/16" 10,000#
Accumulator 220 gallon 6 station with remote control

IRON ROUGHNECK:

NOV ST-80

HYDRAULIC CATWALK:

Forum-Wrangler 3500 Multi-Pin